

DENSELIGHT SEMICONDUCTORS PTE. LTD.
6 Changi North St. 2, S498831 SINGAPORE
Tel: (65) 6415 4488
Fax: (65) 6415 7988
www.denselight.com

SPECIFICATIONS

Ultra Narrow Linewidth 1383nm Laser In DIL Package

DL-CLS051D-S1383

DenseLight Semiconductors reserves the right to make product design or specifications changes without notice.

A. PRODUCT DESCRIPTION

DenseLight **DL-CLS051D-S1383** is a cooled ultra narrow linewidth laser in DIL package with SMF pigtail emitting in the 1383nm wavelength range, which matches with the OH absorption peak of silica based optical fiber. It is engineered for modulation up to 622Mbps. This laser is based on an external cavity laser with built-in fiber Bragg grating, offering very stable performance of lasing wavelength, narrow spectral linewidth and excellent SMSR.

B. FEATURES

- Strained InGaAsP/InP MQW gain chip coupled with built-in fiber Bragg grating
- Lasing wavelength of 1383nm
- Minimum 5mW CW operation
- Minimum SMSR of 45dB
- Linewidth of <200kHz
- Internal thermoelectric cooler and thermistor
- Designed for 155/622Mbps operation
- RoHS Compliance

C. PACKAGING

- 14-pin DIL package with SMF-28 pigtail

D. APPLICATIONS

- OTDR
- Optical measuring instrumentation
- Optical gas and chemical sensor

E. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Condition	Min	Max	Unit
Reverse voltage	V _R			2	V
Forward current	I _F			120	mA
Forward voltage	V _F	I _{op}		2.5	V
Case temperature	T _c	I _{op}	0	60	°C
Laser temperature ¹	T _{Laser}	I _{op}	0	70	°C
Thermoelectric cooler voltage	V _{TEC}			3.0	V
Thermoelectric cooler current	I _{TEC}			1.8	A
Storage temperature	T _{stg}	Unbiased	-40	85	°C
Storage humidity			5	85	%RH
Electro static discharge (ESD)	V _{ESD}	Human body model		500	V
Lead soldering temperature	S _{temp}			260	°C
Lead soldering time	S _{time}			10	sec

¹ T_{Laser} is monitored by internal thermistor with external pin out.

F. ELECTRICAL AND OPTICAL CHARACTERISTICS (T_{Laser} = 25 °C, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Optical output power	P _O	CW	5	—	—	mW
Threshold current	I _{th}	CW	—	30	40	mA
Operating current	I _{op}	CW, 5mW	—	50	70	mA
Operation voltage	V _{op}	CW, 5mW	—	1.2	1.6	V
Slope efficiency	η	CW, 5mW	0.07	0.12	—	mW/mA
Peak wavelength	λ _p	CW, 5mW	1381	1383	1385	nm
Side mode suppression ratio	SMSR	CW, 5mW	45	—	—	dB
Linewidth ²	Δλ	CW, 5mW	—	200	—	kHz
Thermistor resistance	R _{therm}	T _{therm} = 25°C	9.5	10	10.5	kΩ


² Typical linewidth is narrowed to < 10kHz when module is integrated inside DenseLight's BF-series box with high precision laser driver & temperature controller.

G. PACKAGE

Part	Description
Package type	14-pin DIL
Fiber:	SMF-28
MFD	9µm
Cladding diameter	125µm
Coating diameter	245µm
Fiber pigtail length	>1m
Fiber connector	FC/APC

H. OUTLINE DRAWINGS

Typical Package Dimension

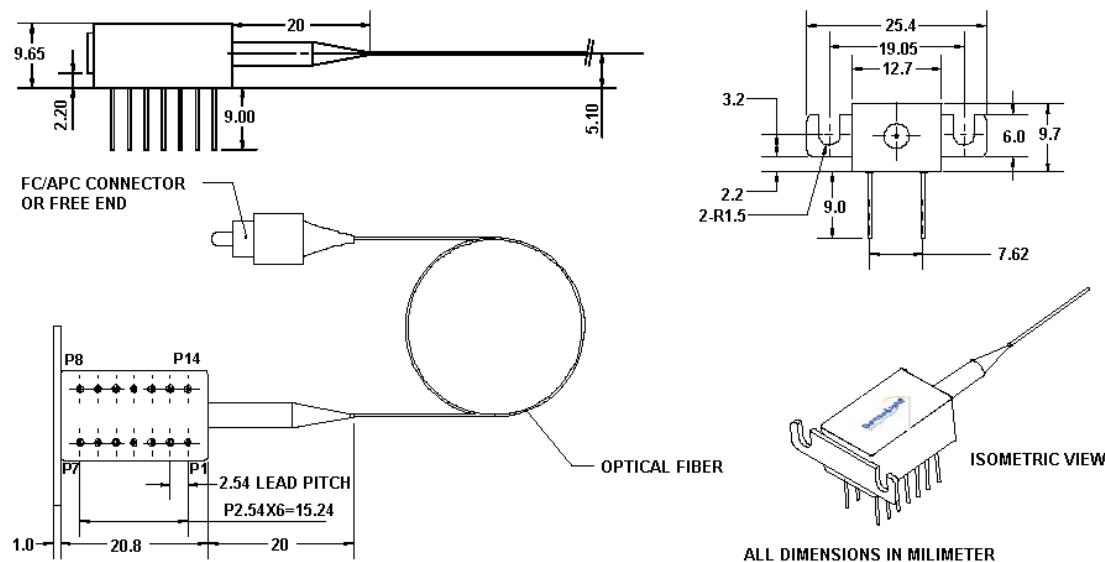

Pin Connections			
1	TEC Anode	8	NC
2	NC	9	Laser Cathode
3	NC	10	NC
4	NC	11	Thermistor
5	Laser Anode	12	Thermistor
6	NC	13	Case Ground
7	NC	14	TEC Cathode

