

DENSELIGHT SEMICONDUCTORS PTE. LTD.
6 Changi North St. 2, S498831 SINGAPORE
Tel: (65) 6415 4488
Fax: (65) 6415 7988
www.denselight.com

SPECIFICATIONS

Ultra Narrow Linewidth 1550nm Laser In BTF Package

DL-CLS101B-FP-S1550

DenseLight Semiconductors reserves the right to make product design or specifications changes without notice.

A. PRODUCT DESCRIPTION

DenseLight **DL-CLS101B-FP-S1550** is a cooled ultra narrow linewidth laser in BTF package with PMF pigtail emitting at 1550nm wavelength. It is engineered for modulation up to 622Mbps. This laser is based on an external cavity laser with built-in fiber Bragg grating, offering very stable performance of lasing wavelength, narrow spectral linewidth and excellent SMSR.

B. FEATURES

- Strained InGaAsP/InP MQW gain chip coupled with built-in fiber Bragg grating
- Lasing wavelength of 1550nm
- Minimum 10mW CW operation
- Minimum SMSR of 45dB
- Linewidth of <200kHz
- Polarization extinction ratio of > 15dB
- Internal thermoelectric cooler and thermistor
- Designed for 155/622Mbps operation
- RoHS Compliance

C. PACKAGING

- 14-pin BTF package with Panda PMF pigtail

D. APPLICATIONS

- OTDR
- Optical measuring instrumentation
- Optical gas and chemical sensor

E. ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Condition | Min | Max | Unit |
|--------------------------------|-------------|------------------|-----|-----|------|
| Reverse voltage | V_R | | | 2 | V |
| Forward current | I_F | | | 200 | mA |
| Forward voltage | V_F | I_{op} | | 2.5 | V |
| Case temperature | T_c | I_{op} | 0 | 60 | °C |
| Laser temperature ¹ | T_{Laser} | I_{op} | 0 | 70 | °C |
| Thermoelectric cooler voltage | V_{TEC} | | | 3.0 | V |
| Thermoelectric cooler current | I_{TEC} | | | 1.8 | A |
| Storage temperature | T_{stg} | Unbiased | -40 | 85 | °C |
| Storage humidity | | | 5 | 85 | %RH |
| Electro static discharge (ESD) | V_{ESD} | Human body model | | 500 | V |
| Lead soldering temperature | S_{temp} | | | 260 | °C |
| Lead soldering time | S_{time} | | | 10 | sec |

¹ T_{Laser} is monitored by internal thermistor with external pin out.

F. ELECTRICAL AND OPTICAL CHARACTERISTICS ($T_{Laser} = 25\text{ °C}$, unless otherwise noted)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|-------------------------------|-----------------|----------------------------|------|------|------|------------|
| Optical output power | P_O | CW | 10 | – | – | mW |
| Threshold current | I_{th} | CW | – | 20 | 30 | mA |
| Operating current | I_{op} | CW, 10mW | – | 100 | 120 | mA |
| Operation voltage | V_{op} | CW, 10mW | – | 1.5 | 2.0 | V |
| Slope efficiency | η | CW, 10mW | 0.08 | 0.12 | – | mW/mA |
| Peak wavelength | λ_p | CW, 10mW | 1548 | 1550 | 1552 | nm |
| Side mode suppression ratio | SMSR | CW, 10mW | 45 | – | – | dB |
| Polarization extinction ratio | PER | CW, 10mW | 15 | – | – | dB |
| Linewidth ² | $\Delta\lambda$ | CW, 10mW | – | 200 | – | kHz |
| Thermistor resistance | R_{therm} | $T_{therm} = 25\text{ °C}$ | 9.5 | 10 | 10.5 | k Ω |


² Typical linewidth is narrowed to < 10kHz when module is integrated inside DenseLight's BF-series box with high precision laser driver & temperature controller.

G. PACKAGE

| Part | Description |
|----------------------|--------------|
| Package type | 14-pin BTF |
| Fiber: | Panda PMF |
| MFD | 10.5 μ m |
| Cladding diameter | 125 μ m |
| Coating diameter | 245 μ m |
| Fiber pigtail length | >1m |
| Fiber connector | FC/APC |

H. OUTLINE DRAWINGS

Typical Package Dimension

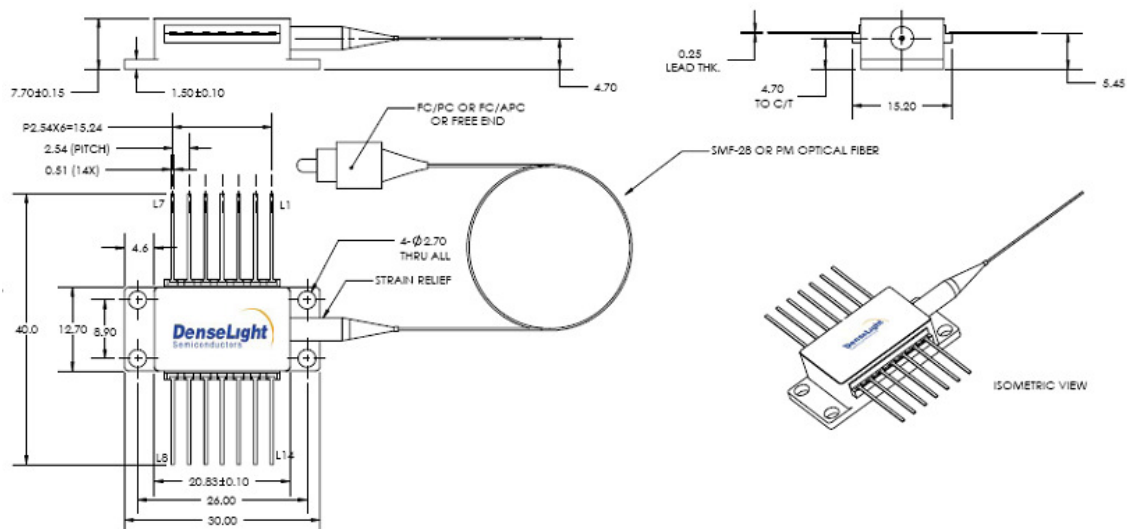

| Pin Assignment | |
|----------------|----------------|
| 1 | TEC (+) |
| 2 | THERMISTOR |
| 3 | |
| 4 | |
| 5 | THERMISTOR |
| 6 | - |
| 7 | - |
| 8 | - |
| 9 | - |
| 10 | LD ANODE (+) |
| 11 | LD CATHODE (-) |
| 12 | - |
| 13 | CASE |
| 14 | TEC (-) |

